


# UWO - Rainwater Storage Tank Assembly

3,500L classic

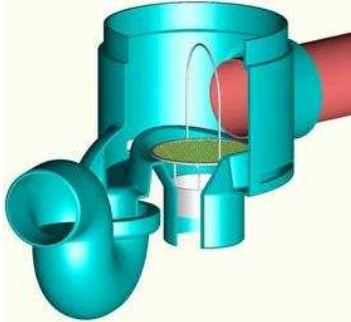

*centrally mounted filter with back wash design and two skimmer slots*

*perfectly smooth internal surface for simple long term cleaning*



*unique vase shaped tank allows floating impurities to settle on top of the large increasing surface area and be removed to overflow via two skimmer slots in the filter bowl*




*unique centrally guided suction float extracts clean water from just below surface level*

- 10 year warranty
- polypropylene 3,500 litre rainwater storage tank
- lightweight easy installation - 150kg fully assembled
- simple hook-up with three standard 110mm drain pipe connections for inlet, overflow and utilities
- loading up to 5.0t over tank with simple structural measures
- pre-installed components - shipped ready to install in ground
- excellent access from large turret diameter with no component removal necessary to enter tank
- internal or external filters



# UWO - Rainwater Storage Tank Assembly

## 3,500L classic

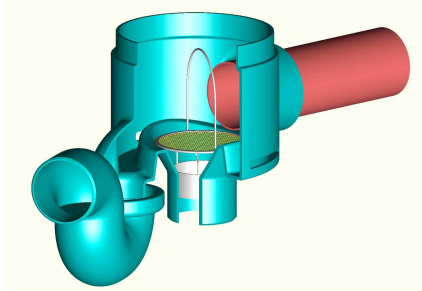

- standard internal tank filter for roof areas up to 250m<sup>2</sup> (factor 1.0)
  - backwash design for self cleaning during heavy rain and overflow
  - removable stainless steel 0.2mm mesh filter
  - calmed inlet and siphon to prevent aroma
  - two skimmer slots to remove floating impurities during overflow
- 
- externally mounted Nova filter for roof areas up to 500m<sup>2</sup> (factor 1.0)
  - self cleaning upon first rainfall until filter is saturated
  - removable stainless steel 0.2mm mesh filter
  - unit shipped with DN100 or DN150 inlet/outlet
  - optional leaf catcher cup

### Classic Tank - Standard Assembly

- internal filter with skimmer and siphon
- calmed tank bottom inlet
- centrally guided suction float
- 2.5m pump suction pipe
- level sensor
- 40cm turret
- standard cover
- anti fall device

### Options

- one way valve (required when connecting to mains drain)
- extended turrets
- 15cm turret
- % full sensor

