


UWO - Rainwater Storage Tank Assembly

3,500L classic

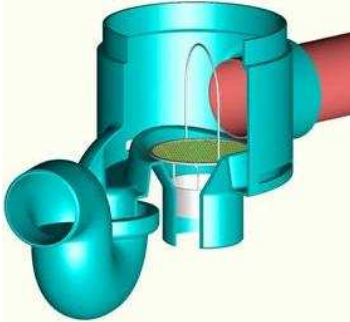

centrally mounted filter with back wash design and two skimmer slots

perfectly smooth internal surface for simple long term cleaning



unique vase shaped tank allows floating impurities to settle on top of the large increasing surface area and be removed to overflow via two skimmer slots in the filter bowl




unique centrally guided suction float extracts clean water from just below surface level

- 10 year warranty
- polypropylene 3,500 litre rainwater storage tank
- lightweight easy installation - 150kg fully assembled
- simple hook-up with three standard 110mm drain pipe connections for inlet, overflow and utilities
- loading up to 5.0t over tank with simple structural measures
- pre-installed components - shipped ready to install in ground
- excellent access from large turret diameter with no component removal necessary to enter tank
- internal or external filters



UWO - Rainwater Storage Tank Assembly

3,500L classic

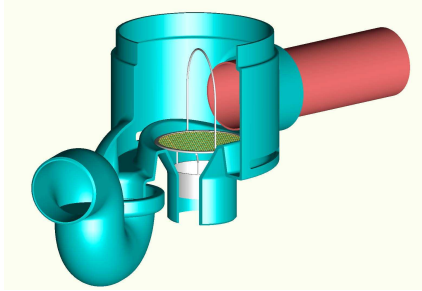

- standard internal tank filter for roof areas up to 250m² (factor 1.0)
 - backwash design for self cleaning during heavy rain and overflow
 - removable stainless steel 0.2mm mesh filter
 - calmed inlet and siphon to prevent aroma
 - two skimmer slots to remove floating impurities during overflow
-
- externally mounted Nova filter for roof areas up to 500m² (factor 1.0)
 - self cleaning upon first rainfall until filter is saturated
 - removable stainless steel 0.2mm mesh filter
 - unit shipped with DN100 or DN150 inlet/outlet
 - optional leaf catcher cup

Classic Tank - Standard Assembly

- internal filter with skimmer and siphon
- calmed tank bottom inlet
- centrally guided suction float
- 2.5m pump suction pipe
- level sensor
- 40cm turret
- standard cover
- anti fall device

Options

- one way valve (required when connecting to mains drain)
- extended turrets
- 15cm turret
- % full sensor

